由 Autodesk 教育版产品制作

| Rev. | Revision Record | 制作 | 日期 |
|---|---|---|---|
| A0 | 首次发行 | Y | 2019-10-11 |
| | | | |
| | | | |

FRONT

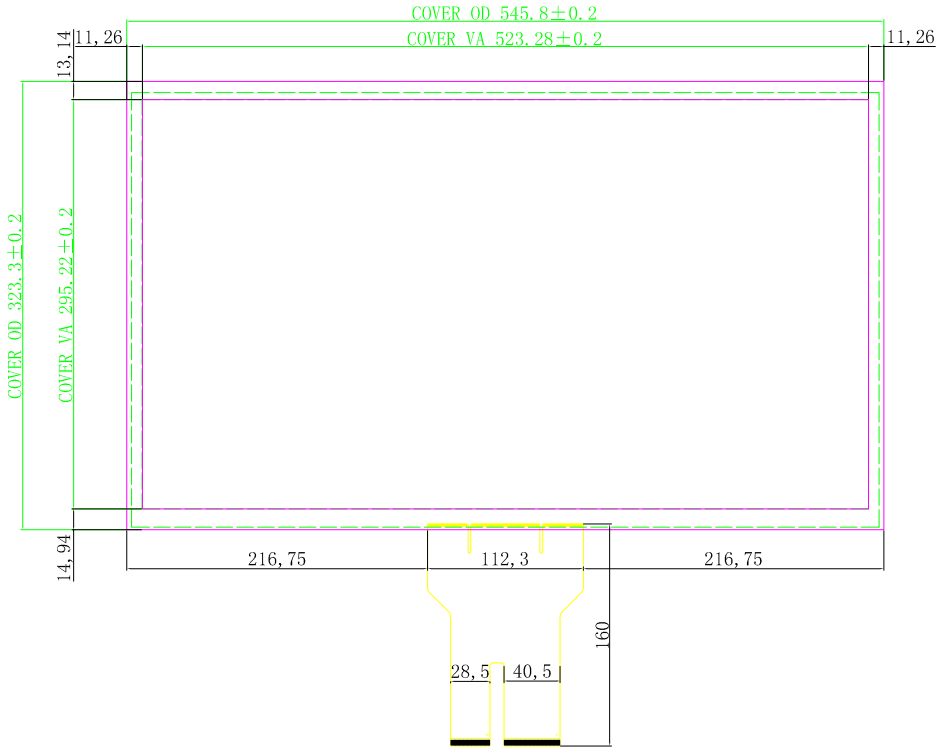


SIDE

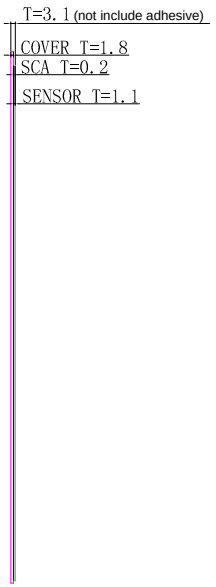


Parameters:
1. TP Structure: G+G
2. TP Type: COB; IC: ILI2312, 78*44
   HA2312P.P3.C3 Voltage: 5V
3. Transmittance: ≥85%
4. Surface Hardness: ≥6H
5. Work Environment: -10°C~60°C, ≤85%RH
6. Storage Environment: -20°C~70°C, ≤85%RH
7. Unmarked dimensional tolerances ±0.5mm
8. Products meet RoHS standard.

| J1(USB通讯) | |
|---|---|
| PIN | 定义 |
| 1 | VDD/5V |
| 2 | D- |
| 3 | D+ |
| 4 | GND |

| J2(I2C通讯) | |
|---|---|
| PIN | 定义 |
| 1 | VDD3.3 |
| 2 | GND |
| 3 | SDA |
| 4 | SCL |
| 5 | INT |
| 6 | RST |

OBEY CO., LIMITED

| | | | | | |
|---|---|---|---|---|---|
| TITLE: 产品编号 | TS236002H-AAA | www.obtouch.com | | | |
| Designed By: 设 计 | Y | Customerid: 客户编号 | | View: 投影方式 | |
| Checked By: 审 核 | | Unit: 单 位 | mm | | |
| Approved By: | | Date: 日 期 | 2019.10.11 | Scale: 比 例 | 1:1 |

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

| Rev. | Revision Record | 制作 | 日期 |
|---|---|---|---|
| A0 | 首次发行 | Y | 2019-10-11 |
| | | | |
| | | | |

BACK

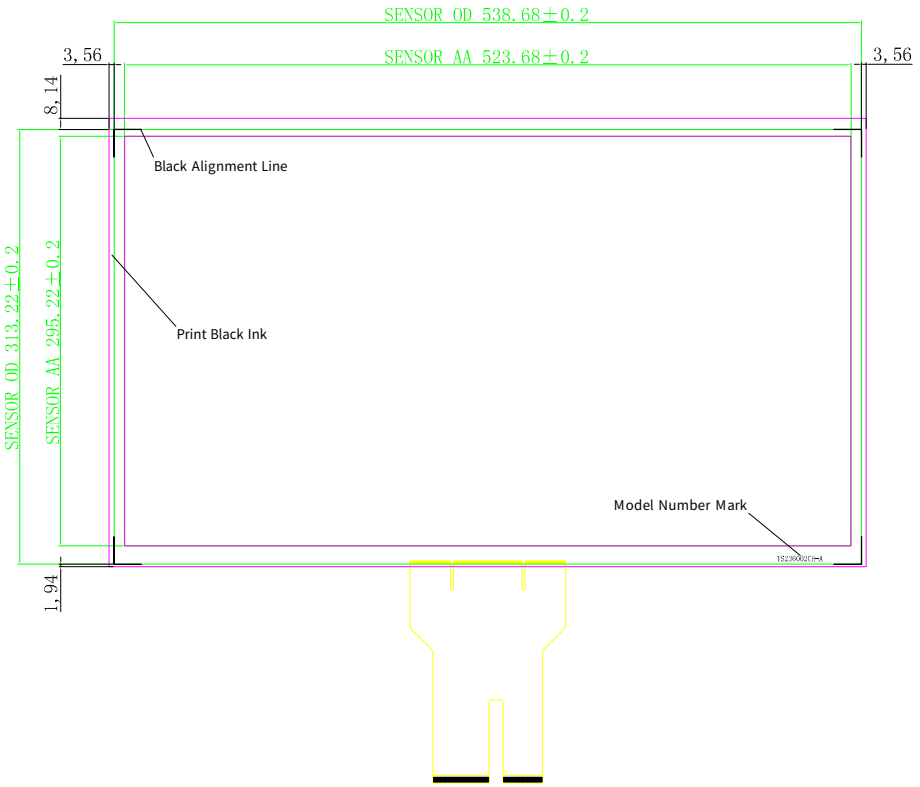


| J1(USB通讯) | |
|---|---|
| PIN | 定义 |
| 1 | VDD/5V |
| 2 | D- |
| 3 | D+ |
| 4 | GND |

| J2(I2C通讯) | |
|---|---|
| PIN | 定义 |
| 1 | VDD3.3 |
| 2 | GND |
| 3 | SDA |
| 4 | SCL |
| 5 | INT |
| 6 | RST |

Parameters:
1. TP Structure: G+G
2. TP Type: COB; IC: ILI2312, 78*44
   HA2312P.P3.C3 Voltage: 5V
3. Transmittance: ≥85%
4. Surface Hardness: ≥6H
5. Work Environment: -10°C~60°C, ≤85%RH
6. Storage Environment: -20°C~70°C, ≤85%RH
7. Unmarked dimensional tolerances ±0.5mm
8. Products meet RoHS standard.

OBEY CO., LIMITED

| TITLE: 产品编号 | TS236002H-AAA | www.obtouch.com | | | |
|---|---|---|---|---|---|
| Designed By: 设 计 | Y | Customerid: 客户编号 | | View: 投影方式 | |
| Checked By: 审 核 | | Unit: 单 位 | mm | | |
| Approved By: | | Date: 日 期 | 2019.10.11 | Scale: 比 例 | 1:1 |

由 Autodesk 教育版产品制作