
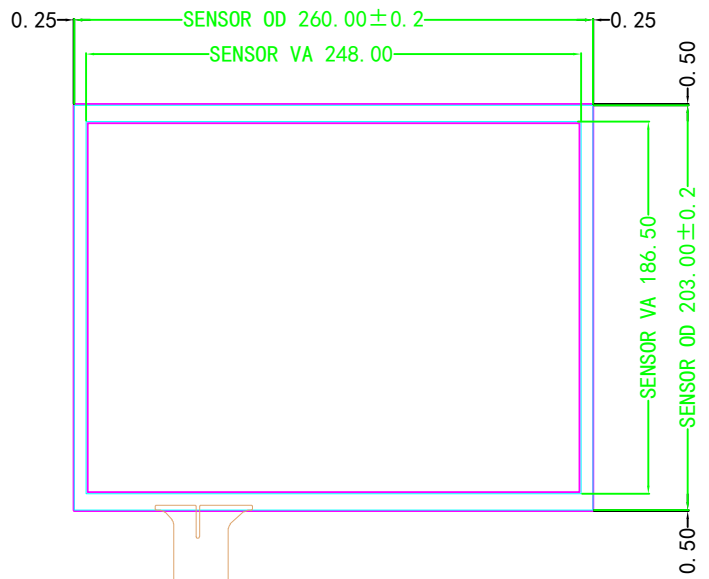
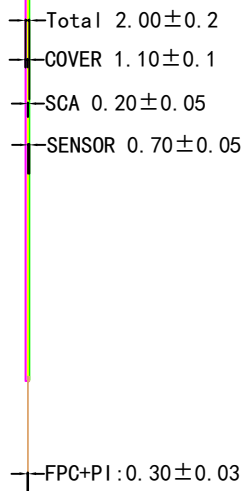


NO.	Rev.	Revision Record	Name	Date
△	A0	首次发行	H	2022-05-11


### FRONT

### SIDE

### BACK

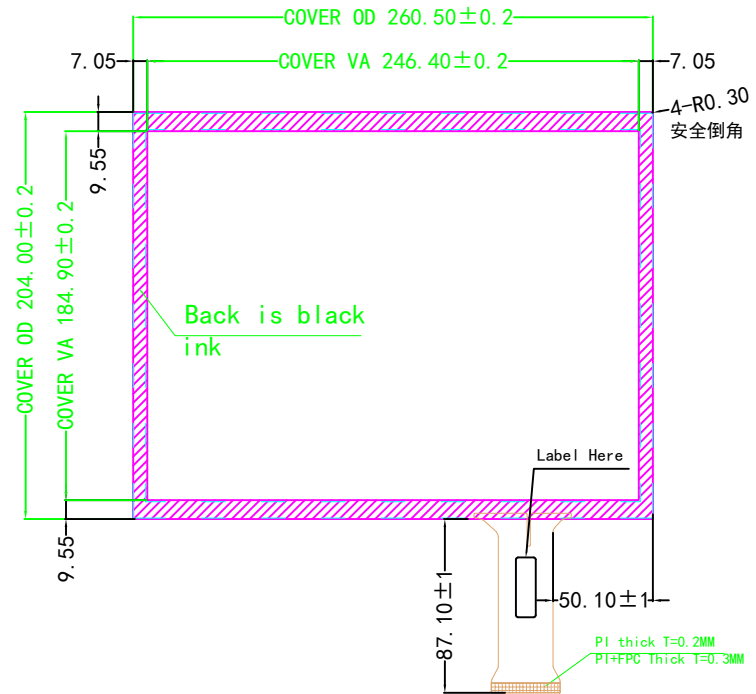

- Technical:
1. TP Structure: G+G;
  2. LENS is Temperature Glass;
  3. TP Type: COB+PCB; Work Voltage: 5V, 10 touch Points; IC: ILI2511;
  4. Surface Hardness  $\geq 6H$ ;
  5. Transmittance  $\geq 85\%$ ;
  6. Unspecified dimensional tolerances  $\pm 0.3mm$ ;
  7. Product meets RoHS standard.
  8. Work Environment:  $-20^{\circ}C \sim +70^{\circ}C$ ,  $\leq 85\%RH$ ;  
Storage Environment:  $-20^{\circ}C \sim +70^{\circ}C$ ,  $\leq 85\%RH$

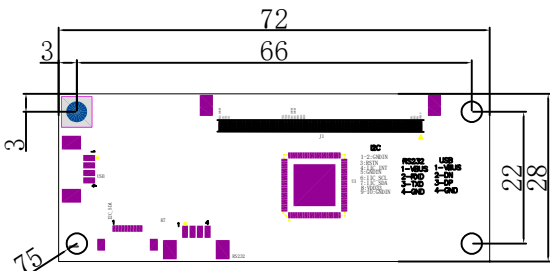

J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

**OBEY CO., LIMITED** www.obeycrop.com  
www.obtouch.com

TITLE: 产品编号	OB121018H-AAA	结构图		
Designed By: 设计	H	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2022-05-11	Scale: 比例
				1:1