
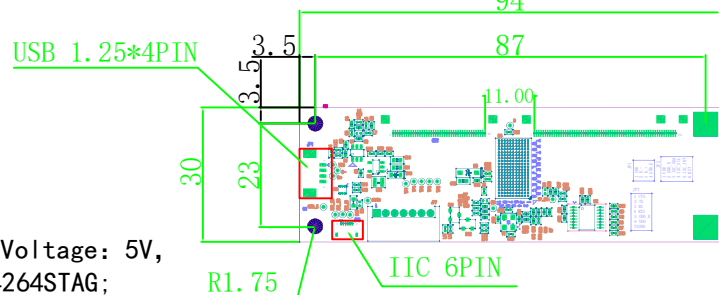


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-06-05
B0	更改为透明盖板	Y	2019-06-05

FRONT


SIDE

BACK

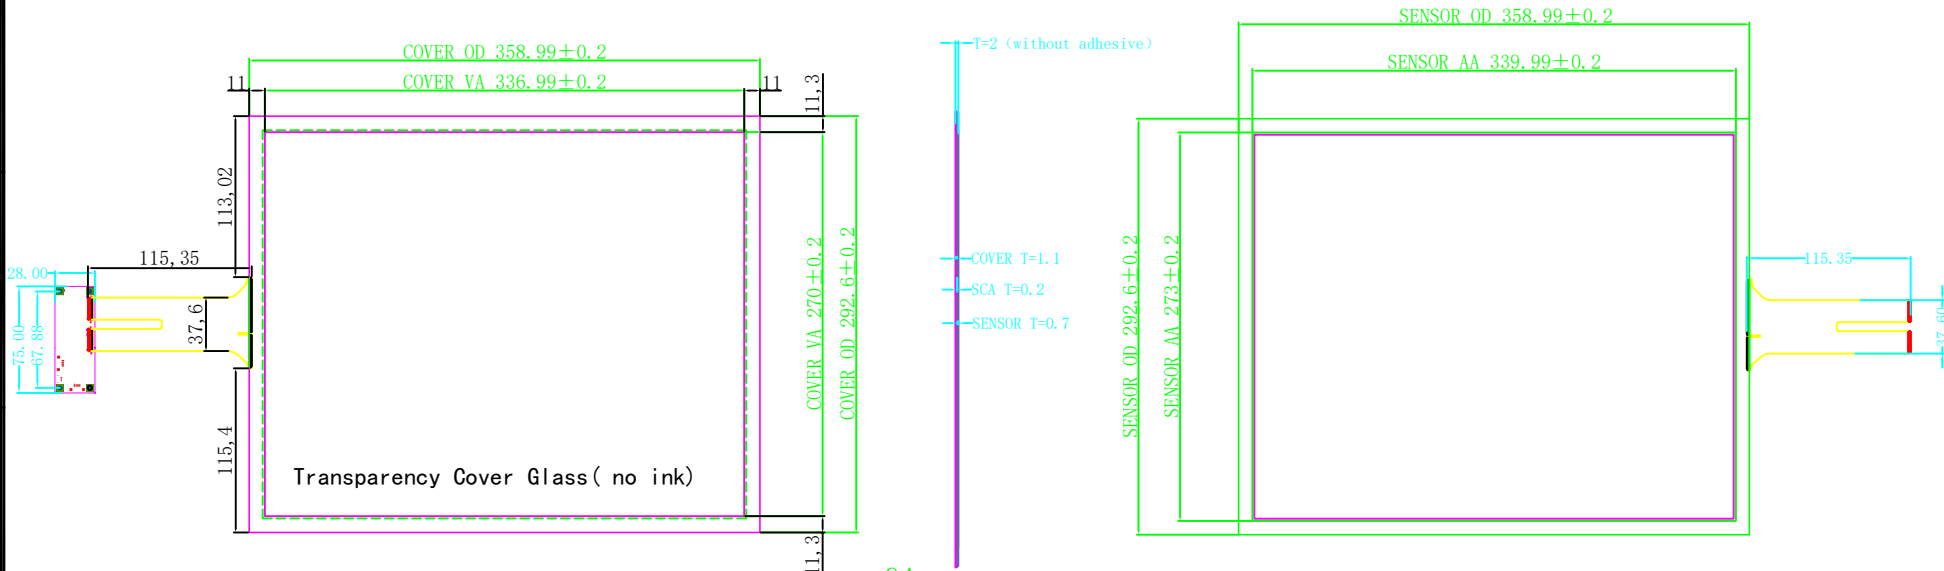

(3:1)

- Technical:
1. TP Structure: G+G;
 2. LENS is Tempered Glass;
 3. TP Type: COB+PCB; Work Voltage: 5V, 10 points; IC: EXC81W604264STAG;
 4. Surface Hardness $\geq 6H$;
 5. Transmittance $\geq 85\%$;
 6. Unspecified tolerance is $\pm 0.5mm$;
 7. Products meets RoHS standard.
 8. Work Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$;
Storage Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$



J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C)	
PIN	Define
1	VDD3.3
2	SDA
3	SCL
4	INT
5	RST
6	GND

OBEY CO., LIMITED

www.obeycrop.com
www.obtouch.com

TITLE: 产品编号	OB170002B-BAA			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2020.11.03	Scale: 比例
				1:1