Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-06-05
B0	更改为透明盖板	Y	2019-06-05

FRONT

SIDE

BACK

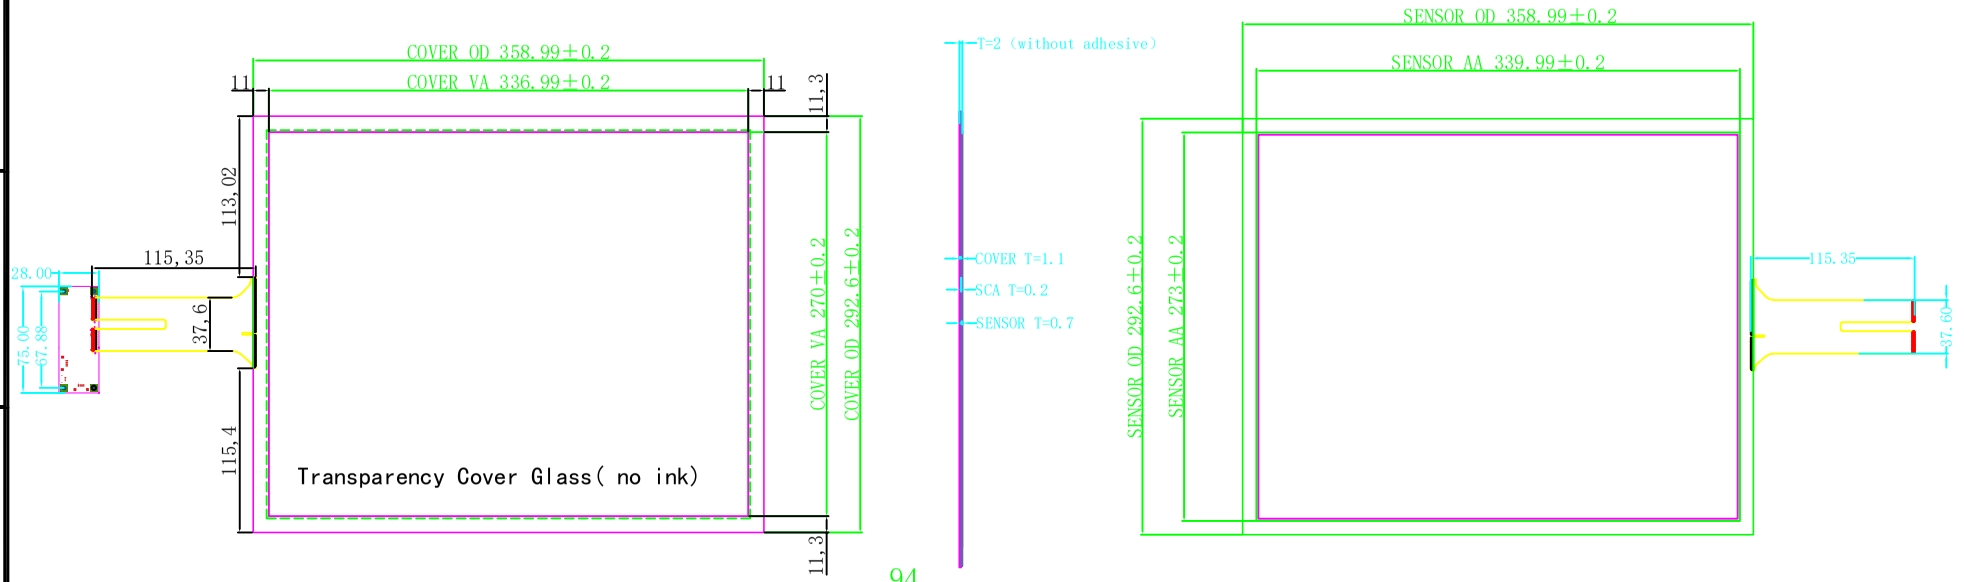

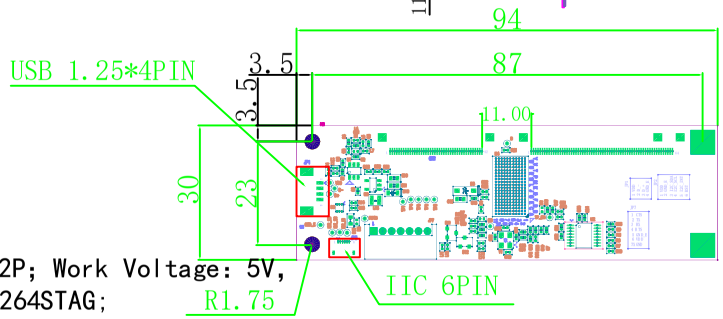

(3:1)



J1(USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

J2(I2C)	
PIN	Define
1	VDD3.3
2	SDA
3	SCL
4	INT
5	RST
6	GND

Technical:

1. TP Structure: G+G;
2. LENS is Tempered Glass;
3. TP Type: COB+PCB; 64P*42P; Work Voltage: 5V, 10 points; IC: EXC81W604264STAG;
4. Surface Hardness≥6H;
5. Transmittance≥85%;
6. Unspecified tolerance is ±0.5mm;
7. Products meets RoHS standard.
8. Work Environment: -20℃~+70℃, ≤85%RH;
   Storage Environment: -20℃~+70℃, ≤85%RH

OBEY CO., LIMITED

www.obeycrop.com
www.obtouch.com

TITLE: 产品编号	OB170002B-BAA				
Designed By: 设 计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审 核		Unit: 单 位	mm		
Approved By:		Date: 日 期	2020.11.03	Scale: 比 例	1:1