


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-06-05
B0	更改为透明盖板	Y	2019-06-05

### FRONT

### SIDE

### BACK

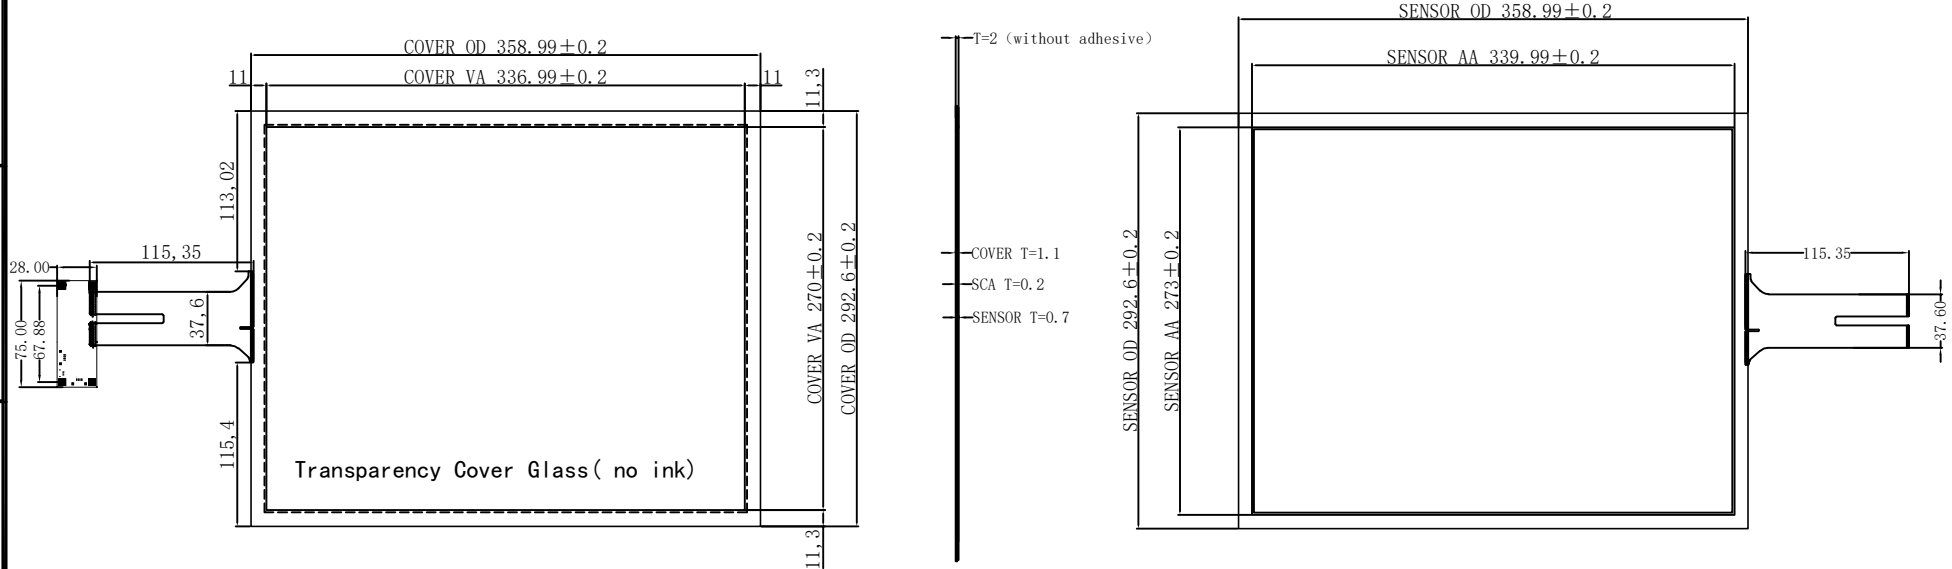

#### Technical

1. TP Structure: G+G; Work Voltage: 5V
2. TP Type: COB; IC: ILI2510, 51\*51  
HA2510P.P1.C3
3. Transmittance:  $\geq 85\%$
4. Surface Hardness:  $\geq 6H$
5. Work Environment:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 85\%RH$
6. Storage Environment:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 85\%RH$
7. Unspecified dimensional tolerances  $\pm 0.3\text{mm}$
8. Product meet RoHS standard.

J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C)	
PIN	Define
1	VDD3.3
2	SDA
3	SCL
4	INT
5	RST
6	GND

OBEY CO., LIMITED

www.obeycorp.com  
www.obtouch.com

TITLE: 产品编号	OB170002B-BAA			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2020.11.03	Scale: 比例
				1:1