



Revision Record			Name	Date
NO.	Rev.			
△	A0	首次发行(TS170014H-AAA-A1改成ILI2510方案)	H	2022-07-16


FRONT

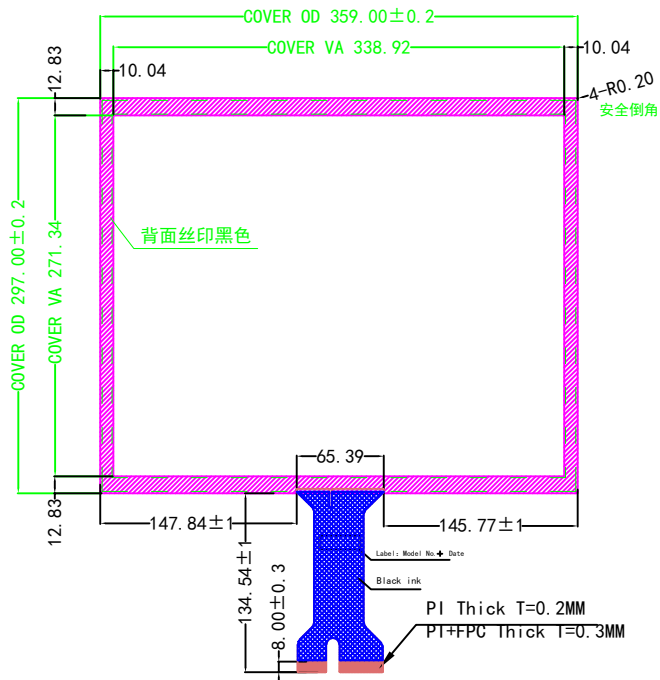

SIDE

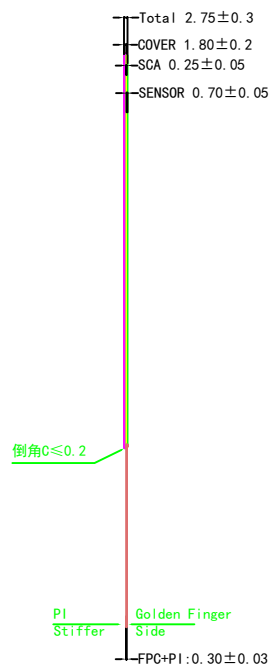


BACK

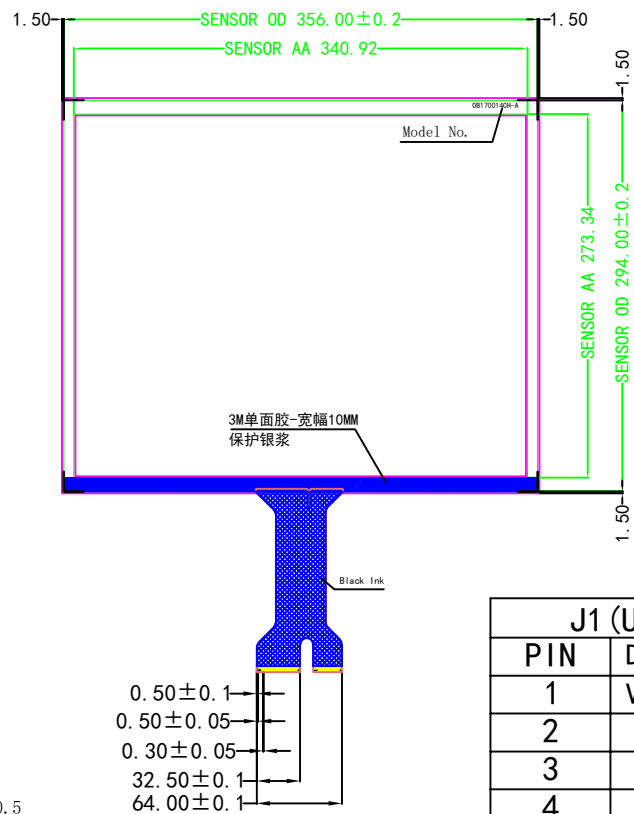

J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

Technical:

1. TP Structure: G+G;
2. LENS is Temperature Glass;
3. TP Type: COB+PCB; Work Voltage: 5V, 10 touch Points; IC: ILI2511;
4. Surface Hardness $\geq 6H$;
5. Transmittance $\geq 85\%$;
6. Unspecified dimensional tolerances $\pm 0.3mm$;
7. Product meets RoHS standard.
8. Work Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$;
Storage Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$

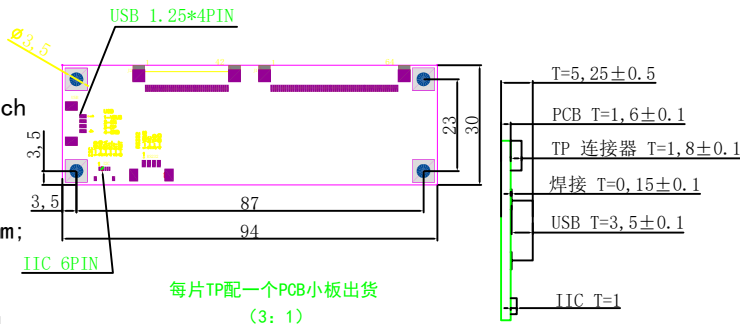

www.obeycorp.com
www.obtouch.com

OBEY CO., LIMITED

TITLE: 产品编号	OB170014H-AAA-A2	结构图		
Designed By: 设计	H	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2022-07-16	Scale: 比例
				1:1