



Revision Record			Name	Date
NO.	Rev.			
△	A0	首次发行 (TS170014H-AAA-A1改成3MM盖板)	H	2022-07-02


### FRONT

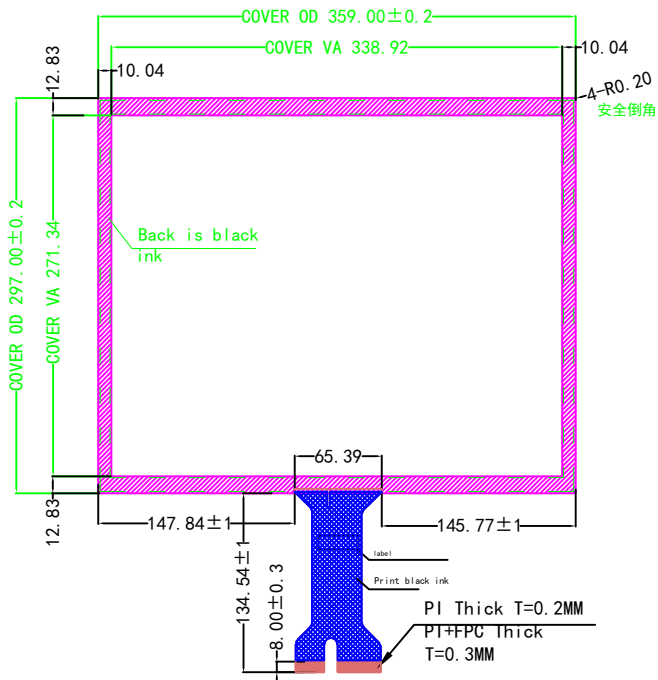


### SIDE

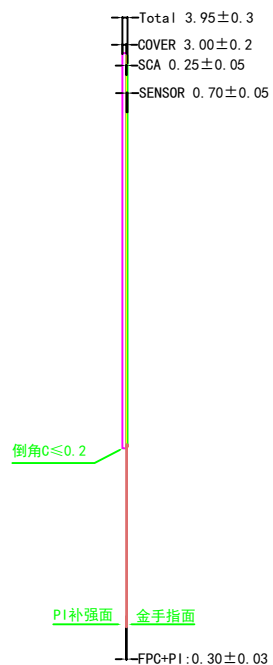

### BACK

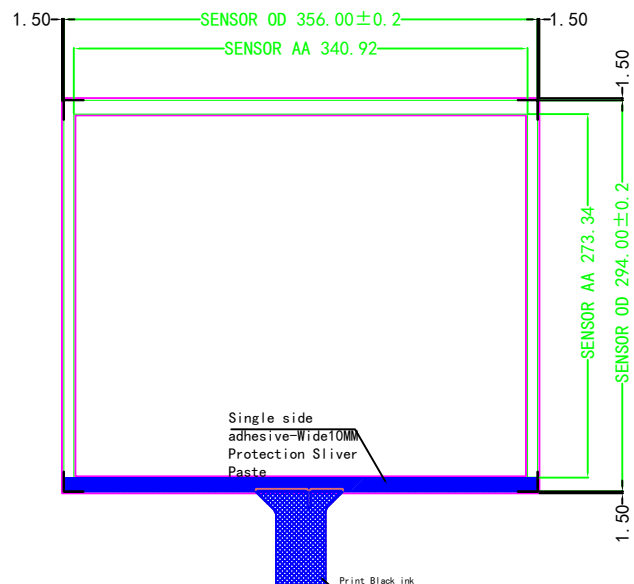


J1 (USB)	
PIN	DEFINE
1	VDD/5V
2	D-
3	D+
4	GND




#### Technical:

1. TP Structure: G+G;
2. LENS is Temperature Glass;
3. TP Type: COB+PCB; Work Voltage: 5V, 10 touch Points; IC: WD8752;
4. Surface Hardness≥6H;
5. Transmittance≥85%;
6. Unspecified dimensional tolerances ±0.3mm;
7. Product meets RoHS standard.
8. Work Environment: -20°C~+70°C, ≤85%RH;  
Storage Environment: -20°C~+70°C, ≤85%RH

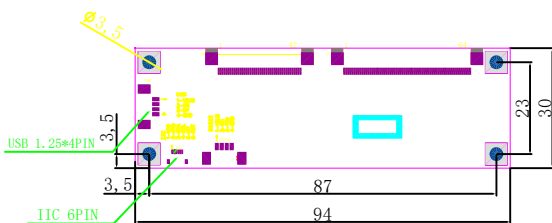

每片TP配一个PCB小板出货  
(3: 1)



**OBEY CO., LIMITED** www.obeycrop.com  
www.obtouch.com

TITLE: 产品编号	OB170014H-BAA-A1	结构图		
Designed By: 设计	H	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2022-07-02	Scale: 比例
				1:1