
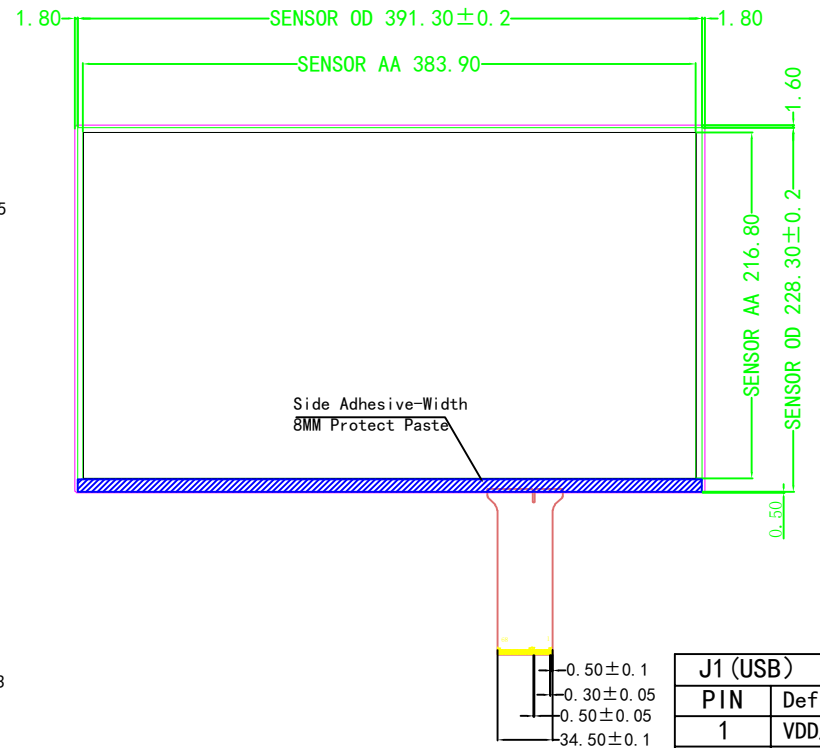


NO.	Rev.	Revision Record	Name	Date
△	A0	首次发行	L	2022-10-06

FRONT

SIDE


BACK

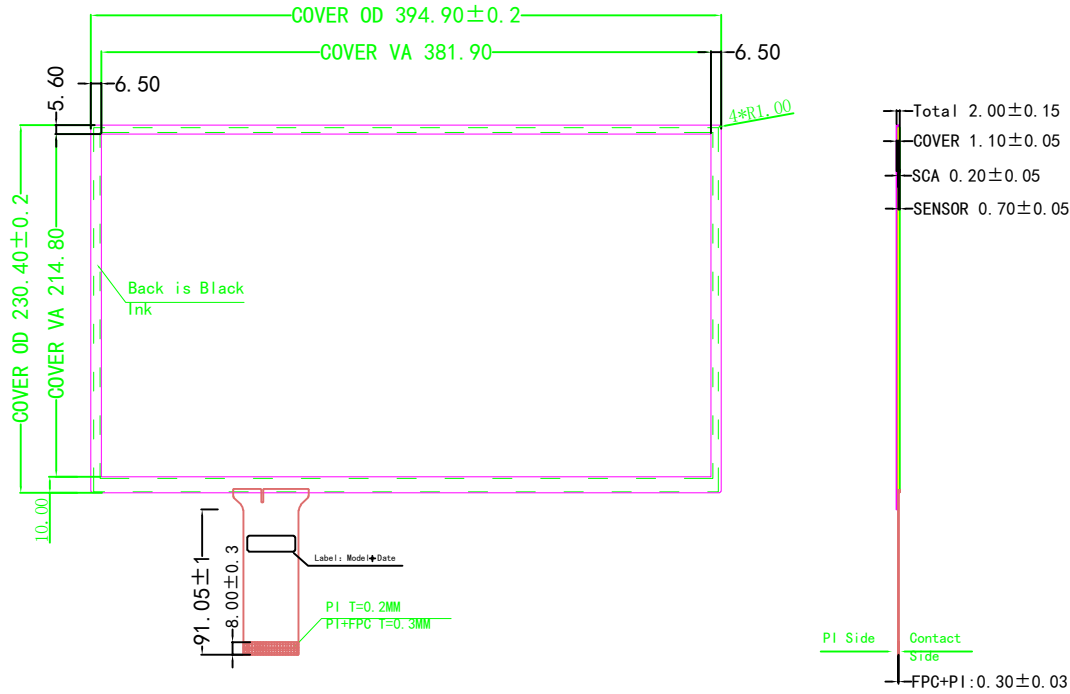

J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

Technical:

1. TP Structure: G+G;
2. LENS is Temperature Glass;
3. TP Type: COB+PCB; Work Voltage: 5V, 10 touch Points; IC: ILI2511;
4. Surface Hardness $\geq 6H$;
5. Transmittance $\geq 85\%$;
6. Unspecified dimensional tolerances $\pm 0.3mm$;
7. Product meets RoHS standard.
8. Work Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$;
Storage Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$

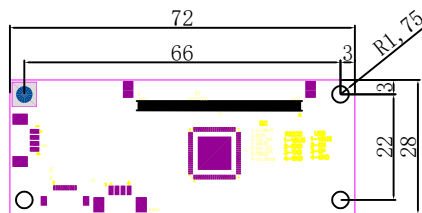

每片TP配一个PCB小板出货
(3: 1)

- T=5, 25 ± 0.5
- PCB T=1, 6 ± 0.1
- TP连接器T=1, 8
- 焊接T=0, 15
- USB T=3, 5
- IIC T=2

OBHEY CO., LIMITED

www.obeycrop.com
www.obtouch.com

TITLE: 产品编号	OB173008H-AAA-A1	结构图		
Designed By: 设计	L	Customerid: 客户编号	View: 投影方式	
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2022-10-06	Scale: 比例
				1:1