


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2021-11-27


FRONT



SIDE

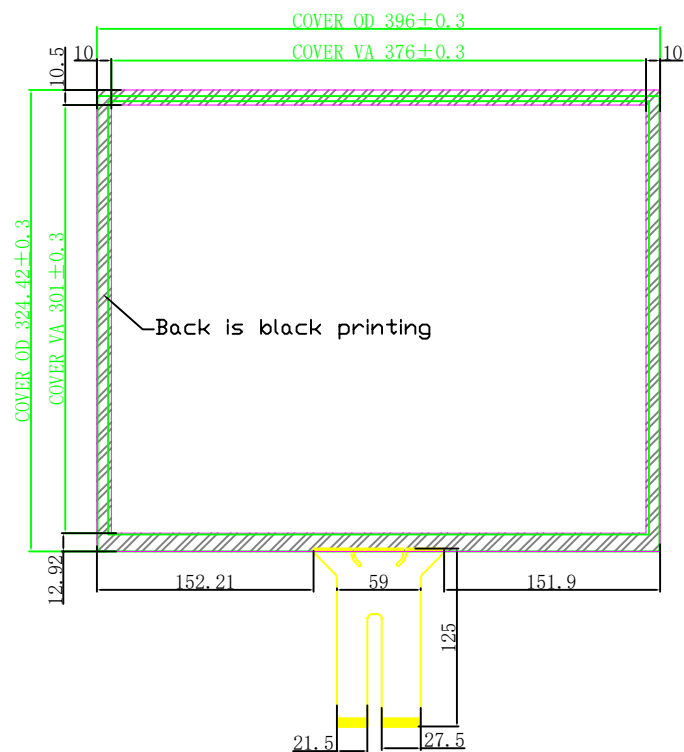


BACK

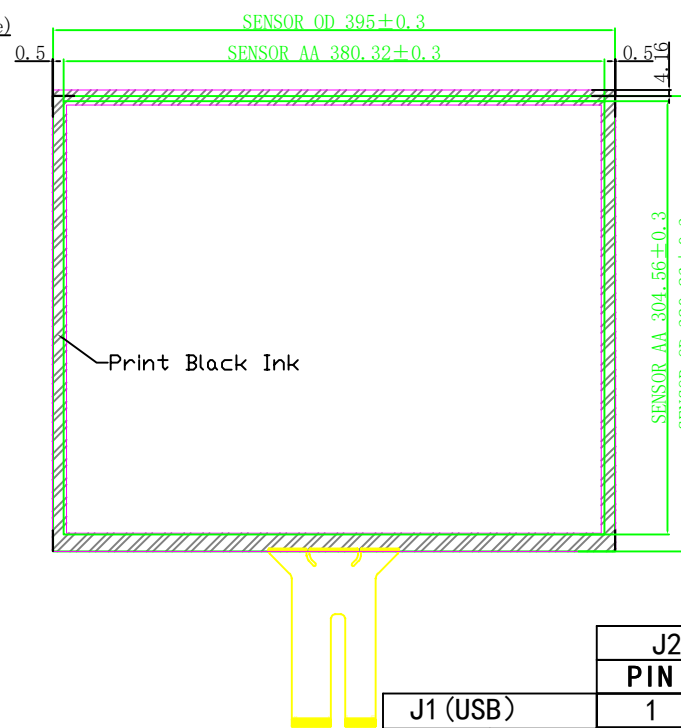

Technical

- TP Structure: G+G; Work Voltage: 5V
- TP Type: COB; IC: WD8752 42*54
WD8752_5442_V1
- Transmittance: $\geq 85\%$
- Surface Hardness: $\geq 6H$
- Work Environment: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\%RH$
- Storage Environment: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\%RH$
- Unspecified dimensional tolerances $\pm 0.3\text{mm}$
- Product meet RoHS standard.

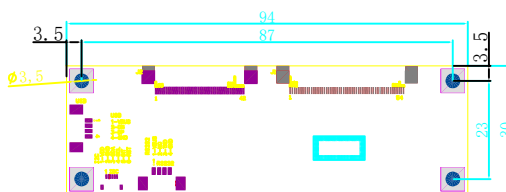

		J2 (I2C)	
		PIN	Define
		1	VDD3.3
J1 (USB)		2	GND
PIN	Define	3	SDA
1	VDD/5V	4	SCL
2	D-	5	INT
3	D+	6	RST
4	GND		

OBEY CO., LIMITED				www.obeycrop.com www.obtouch.com	
TITLE: 产品编号		OB190007H-AAA			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By:		Date: 日期	2021.11.27		