
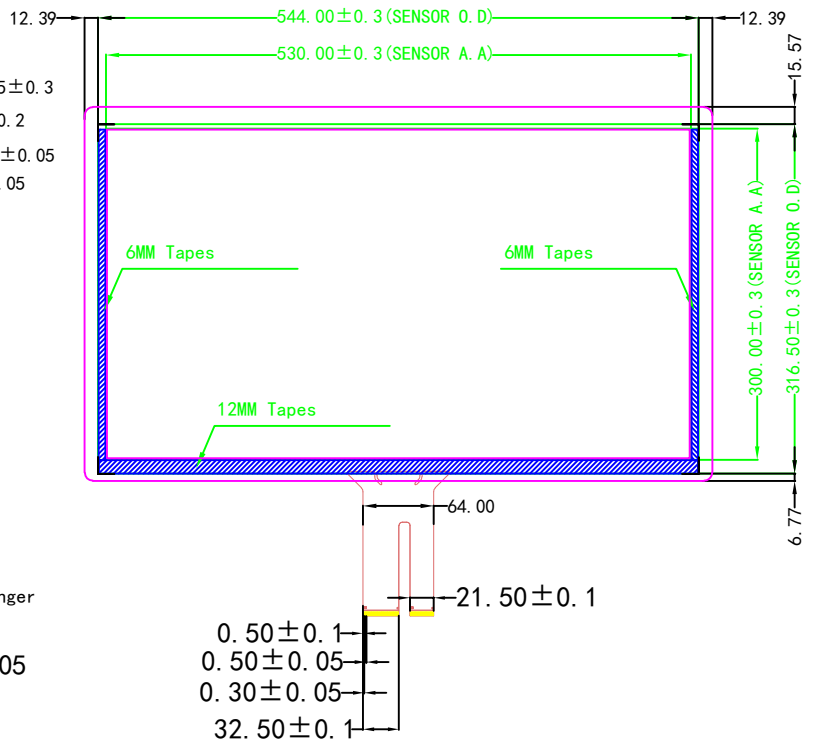
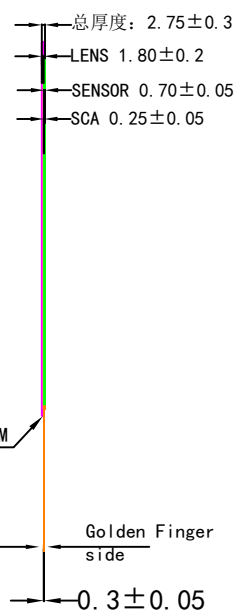


NO.	Rev.	Revision Record	Name	Date
△	A0	首次发行 (OB238003H-BAA改成ILI2510方案)	H	2022-07-29


FRONT

SIDE

BACK

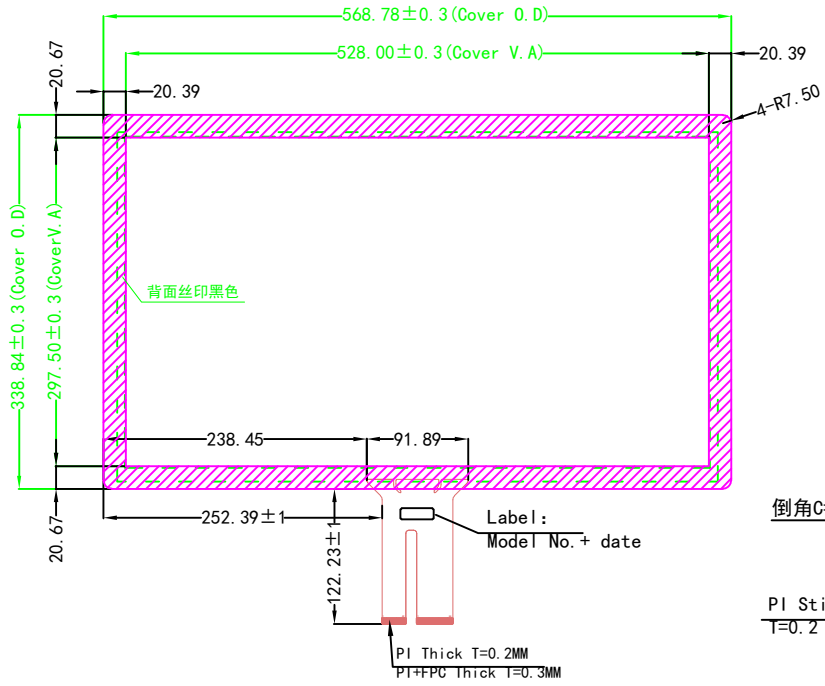

- Technical:
- TP Structure: G+G;
 - LENS is Temperature Glass;
 - TP Type: COB+PCB; 64P*24P; Work Voltage: 5V, 10 touch Points; IC: ILI2511;
 - Surface Hardness $\geq 6H$;
 - Transmittance $\geq 85\%$;
 - Unspecified dimensional tolerances $\pm 0.3mm$;
 - Product meets RoHS standard.
 - Work Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$;
Storage Environment: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$

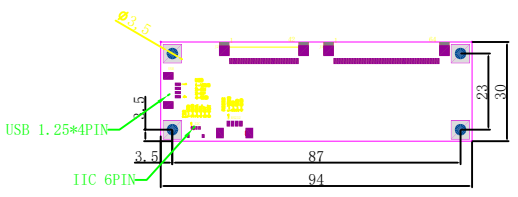

(3:1)
Per TP with a PCB

- T=5.25±0.5
- PCB T=1.6±0.1
- TP 连接器 T=1.8±0.1
- 焊接 T=0.15±0.1
- USB T=3.5±0.1
- IIC T=1

OBEY CO., LIMITED		www.obeycrop.com www.obtouch.com	
TITLE: 产品编号	OB238003H-BAA-A2	结构图	
Designed By: 设计	H	Customerid: 客户编号	View: 投影方式
Checked By: 审核		Unit: 单位	mm
Approved By:		Date: 日期	2022-07-29
		Scale: 比例	1:1