


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-05-27


FRONT

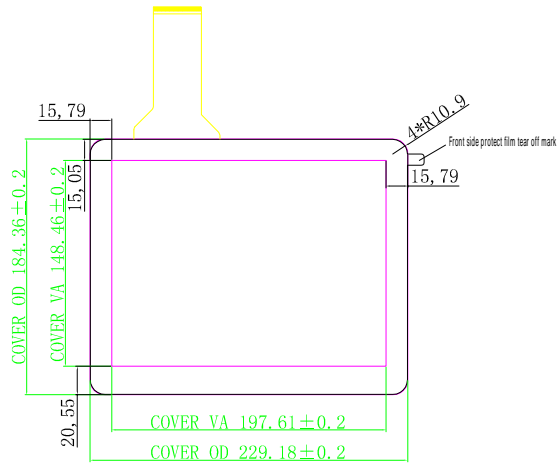

SIDE

T=2
COVER T=1.1
SCA T=0.2
SENSOR T=0.7

BACK

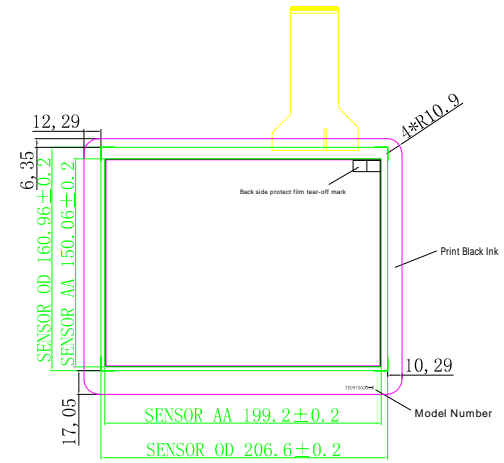

1.1mm cover glass, need temoered process, 2019-05-27



Parameters:

- TP Structure: G+G
- TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C2 Voltage: 5V
- Transmittance: 85%
- Surface Hardness: 6H
- Work Environment: -10 ~60 , 85%RH
- Storage Environment: -20 ~70 , 85%RH
- Unmarked dimensional tolerances $\pm 0.2\text{mm}$
- Products meet RoHS standard.

J1 (USB)		J2 (I2C)	
PIN	DEFINE	PIN	DEFINE
1	VDD/5V	1	VDD3.3
2	D-	2	SDA
3	D+	3	SCL
4	GND	4	INT
		5	RST
		6	GND

OBEY CO., LIMITED

TITLE: 产品编号	TS097002H-AAA	www.obtouch.com		
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2019.05.27	Scale: 比例
				1:1

Autodesk 教育版产品制作

Autodesk 教育版产品制作