


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-07-09


FRONT

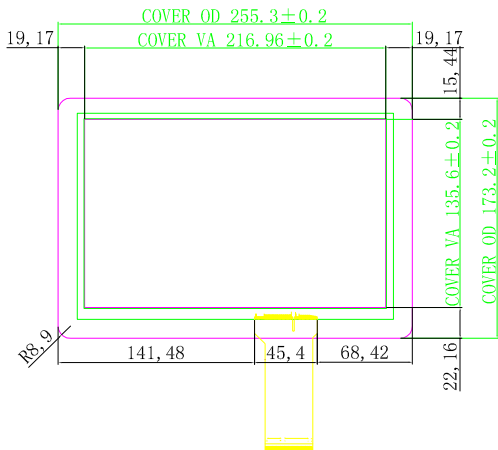

SIDE

T=2
COVER T=1.1
SCA T=0.2
SENSOR T=0.7

BACK

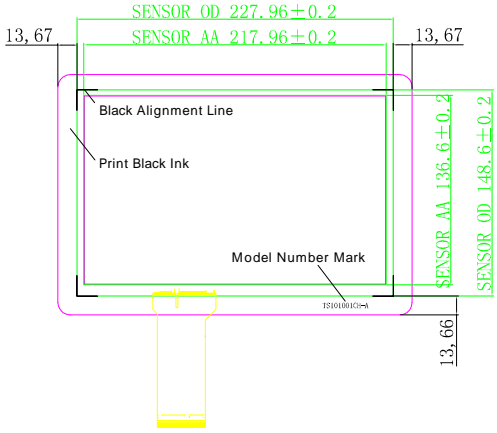

- Parameters:
- TP Structure: G+G
 - TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C3 Voltage: 5V
 - Transmittance: 85%
 - Surface Hardness: 6H
 - Work Environment: -10 ~60 , 85%RH
 - Storage Environment: -20 ~70 , 85%RH
 - Unmarked dimensional tolerances ±0.2mm
 - Products meet RoHS standard.

J2 (I2C)	
PIN	DEFINE
1	GND
2	GND
3	RST
4	INT
5	GND
6	SCL
7	SDA
8	VDD3.3
9	GND
10	GND

J1 (USB)	
PIN	DEFINE
1	VDD/5V
2	D-
3	D+
4	GND

OBEY CO., LIMITED

TITLE: 产品编号	TS101001H-AAA	www.obtouch.com			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By:		Date: 日期	2019.05.27		

Autodesk 教育版产品制作

Autodesk 教育版产品制作