



Rev.	Revision Record	DATE
A0	Initial Issue	Y 2019-09-17


FRONT

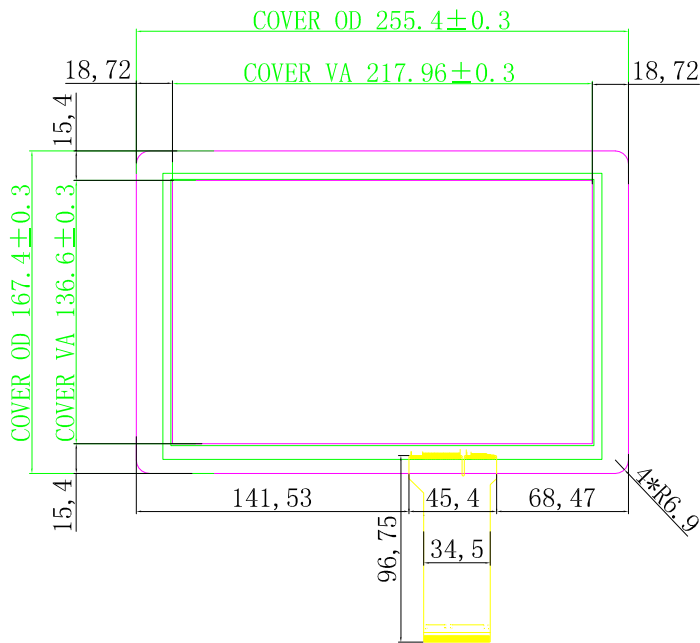

SIDE

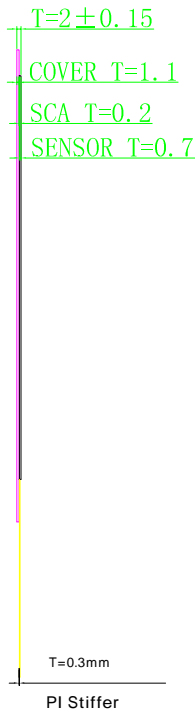

BACK

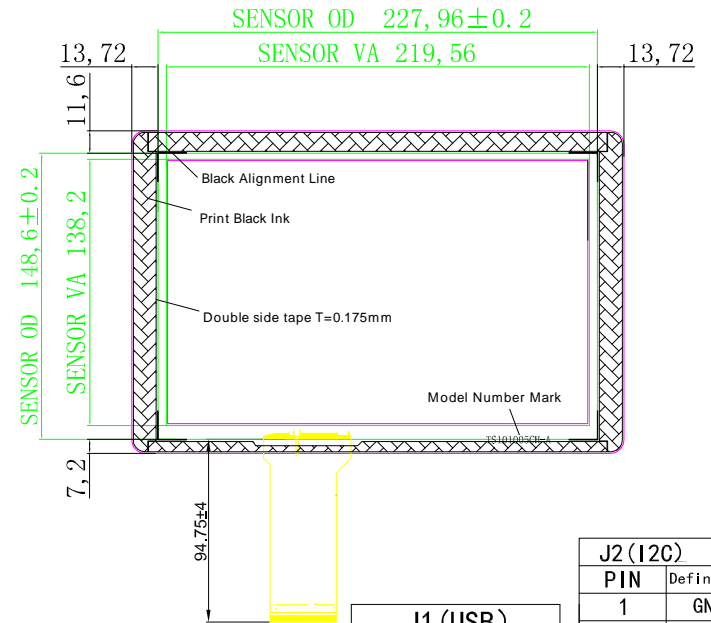

Parameters:

1. TP Structure: G+G
2. TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C3 Voltage: 5V
3. Transmittance: 85%
4. Surface Hardness: 6H
5. Operation Voltage: 3.3V
6. Work Environment: -10 ~60 , 85%RH
7. Storage Environment: -20 ~70 , 85%RH
8. Unmarked dimensional tolerances ± 0.2mm
9. Products meet RoHS standard.



J1 (USB)	
PIN	Definition
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C)	
PIN	Definition
1	GND
2	GND
3	RST
4	INT
5	GND
6	SCL
7	SDA
8	VDD3.3
9	GND
10	GND

OBEY CO., LIMITED

TITLE:	TS101005H-AAA	www.obtouch.com			
Designed By:	Y	Customerid:		View:	
Checked By:		Unit:	mm	Scale:	1:1
Approved By:		Date:	2019.09.17		

Autodesk 教育版产品制作