



| Rev. | Revision Record | 制作 | 日期         |
|------|-----------------|----|------------|
| A0   | 首次发行            | Y  | 2020-04-18 |
|      |                 |    |            |
|      |                 |    |            |


FRONT

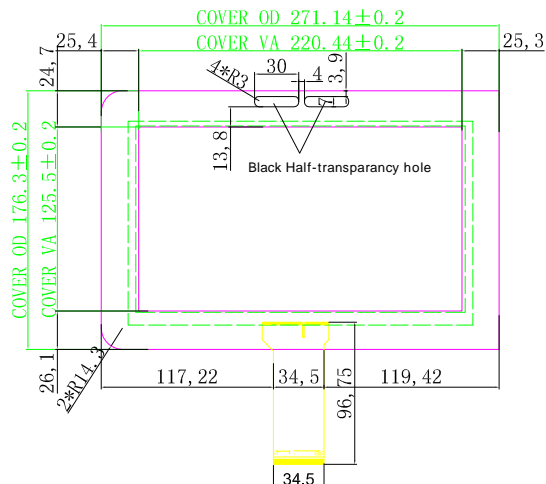

SIDE

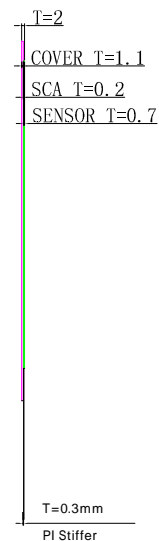

BACK

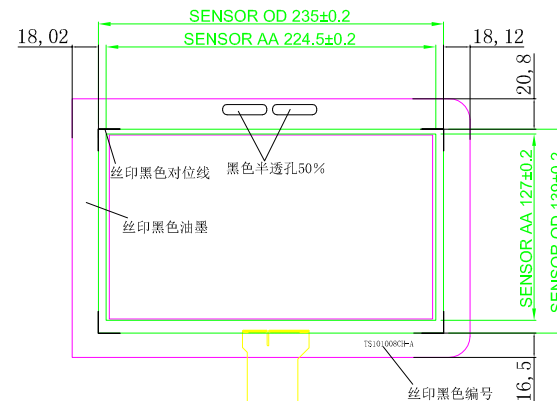


| J2 (12C) |        |
|----------|--------|
| PIN      | DEFINE |
| 1        | GND    |
| 2        | GND    |
| 3        | RST    |
| 4        | INT    |
| 5        | GND    |
| 6        | SCL    |
| 7        | SDA    |
| 8        | VDD3.3 |
| 9        | GND    |
| 10       | GND    |

| J1 (USB) |        |
|----------|--------|
| PIN      | DEFINE |
| 1        | VDD/5V |
| 2        | D-     |
| 3        | D+     |
| 4        | GND    |

Parameters:

- TP Structure: G+G
- TP Type: COB; IC: ILI2511,68P  
HA2511P.P1.C3 Voltage: 5V
- Transmittance: 85%
- Surface Hardness: 6H
- Work Environment: -10 ~60 , 85%RH
- Storage Environment: -20 ~70 , 85%RH
- Unmarked dimensional tolerances ± 0.2mm
- Products meet RoHS standard.



OBEY CO., LIMITED

|                    |               |                     |            |               |
|--------------------|---------------|---------------------|------------|---------------|
| TITLE:<br>产品编号     | TS101008H-AAA | www.obtouch.com     |            |               |
| Designed By:<br>设计 | Y             | Customerid:<br>客户编号 |            | View:<br>投影方式 |
| Checked By:<br>审核  |               | Unit:<br>单位         | mm         |               |
| Approved By:       |               | Date:<br>日期         | 2020.04.18 | Scale:<br>比例  |
|                    |               |                     |            | 1:1           |