


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2020-03-02
B	更改R角为4.2	Y	2020-06-18


FRONT

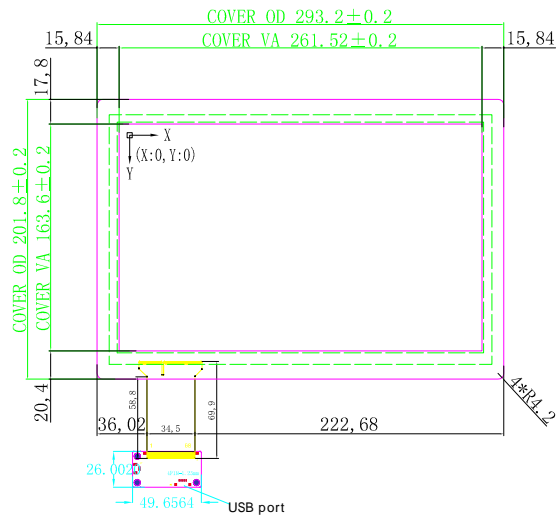

SIDE

T=2.0 (not include the adhesive)
COVER T=1.1
SCA T=0.2
SENSOR T=0.7

BACK

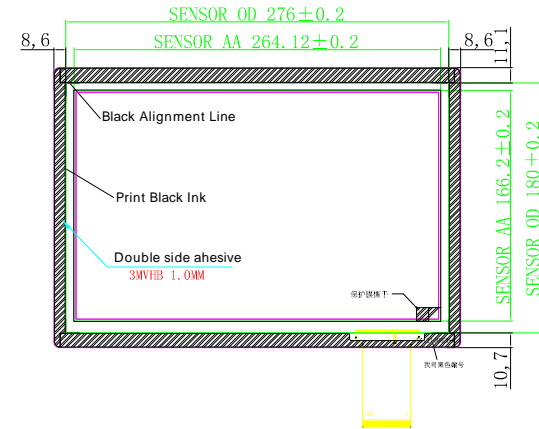

Parameters:

1. TP Structure: G+G
2. TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C2 Voltage: 5V
3. Transmittance: 85%
4. Surface Hardness: 6H
5. Operation Voltage
5. Work Environment: -10 ~60 , 85%RH
6. Storage Environment: -20 ~70 , 85%RH
7. Unmarked dimensional tolerances $\pm 0.2\text{mm}$
8. Products meet RoHS standard.

J1 (USB通讯)		J2 (I2C通讯)	
PIN	定义	PIN	定义
1	VDD/5V	1	VDD3.3
2	D-	2	SDA
3	D+	3	SCL
4	GND	4	INT
		5	RST
		6	GND

OBEY CO., LIMITED

TITLE: 产品编号	TS121006H-CAA	www.obtouch.com		
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2020.03.02	Scale: 比例
				1:1