


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-05-31


FRONT

SIDE

BACK

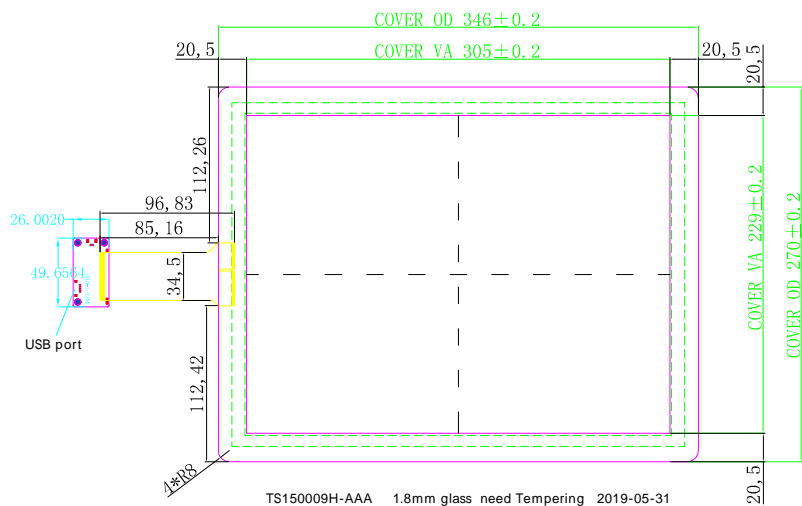

T=2.7 (not include adhesive)
COVER T=1.8
SCA T=0.2
SENSOR T=0.7

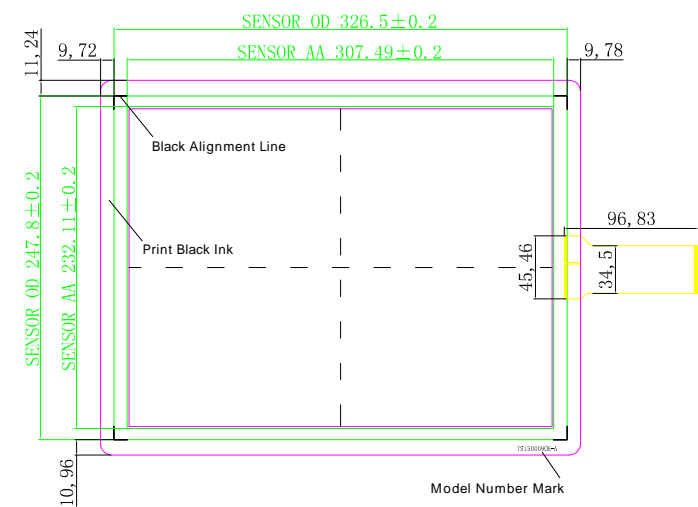

- Parameters:
- TP Structure: G+G
 - TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C2 Voltage: 5V
 - Transmittance: 85%
 - Surface Hardness: 6H
 - Work Environment: -10 ~60 , 85%RH
 - Storage Environment: -20 ~70 , 85%RH
 - Unmarked dimensional tolerances $\pm 0.5\text{mm}$
 - Products meet RoHS standard.

J1 (USB通讯)		J2 (I2C通讯)	
PIN	定义	PIN	定义
1	VDD/5V	1	VDD3.3
2	D-	2	SDA
3	D+	3	SCL
4	GND	4	INT
		5	RST
		6	GND

OBEY CO., LIMITED

TITLE: 产品编号	TS150009-AAA	Original model no. TS150A5BC012		
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2019.05.31	Scale: 比例
				1:1

Autodesk 教育版产品制作

Autodesk 教育版产品制作