



Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-08-15
A0	更改对位线, 更改FOG	Y	2019-08-20


FRONT

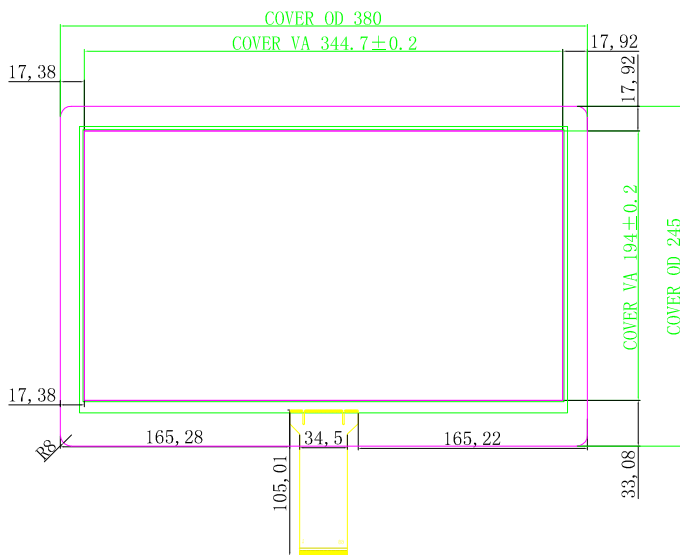

SIDE

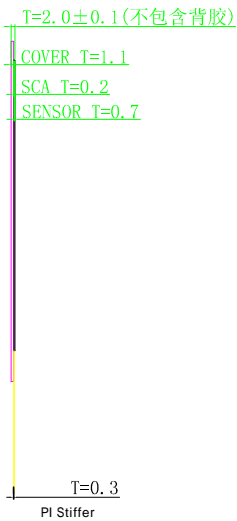

BACK

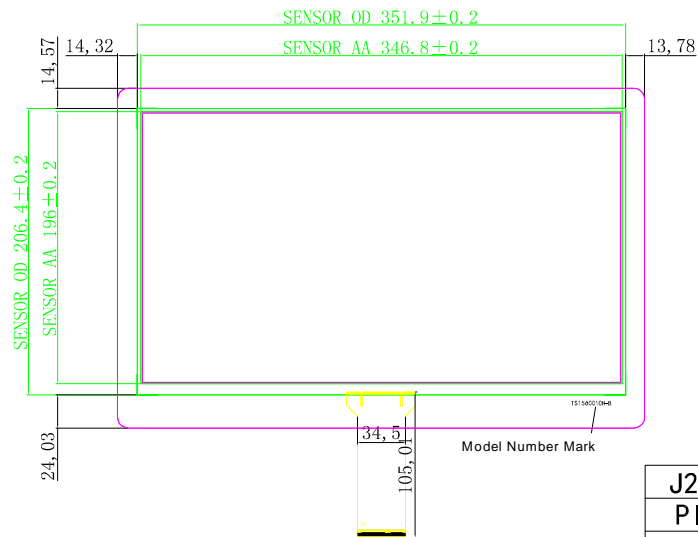

Parameters:

1. TP Structure: G+G
2. TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C3 Voltage: 5V
3. Transmittance: 85%
4. Surface Hardness: 6H
5. Work Environment: -10 ~60 , 85%RH
6. Storage Environment: -20 ~70 , 85%RH
7. Unmarked dimensional tolerances $\pm 0.5\text{mm}$
8. Products meet RoHS standard.

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

PIN	定义
1	GND
2	GND
3	RST
4	INT
5	GND
6	SCL
7	SDA
8	VDD3.3
9	GND
10	GND

OBEY CO., LIMITED

TITLE: 产品编号	TS156001H-BBB	www.obtouch.com			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By:		Date: 日期	2019.08.15		