



Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-06-05


FRONT

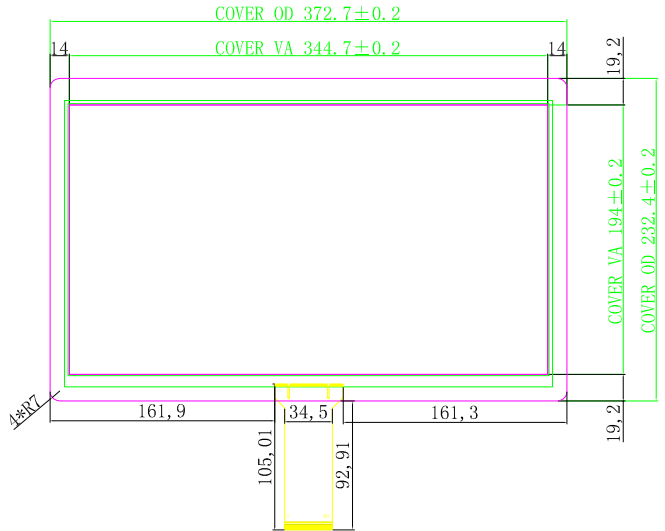

SIDE

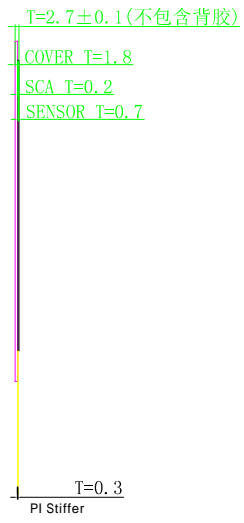

BACK

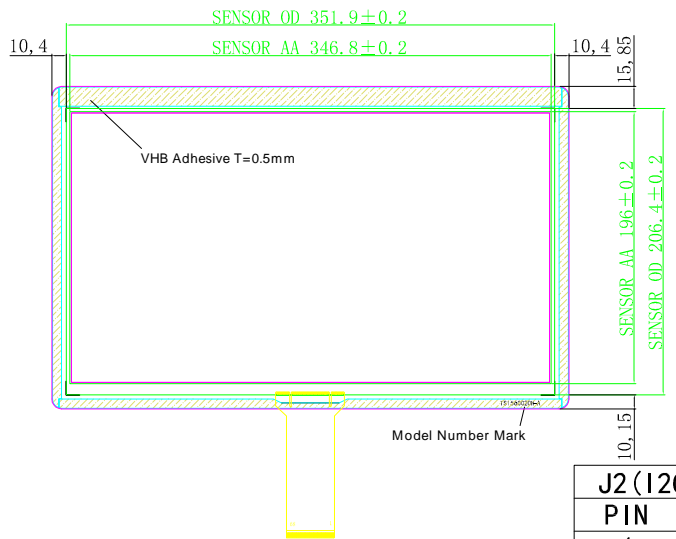

Autodesk 教育版产品制作

Autodesk 教育版产品制作

Parameters:

- TP Structure: G+G
- TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C3 Voltage: 5V
- Transmittance: 85%
- Surface Hardness: 6H
- Work Environment: -10 ~60 , 85%RH
- Storage Environment: -20 ~70 , 85%RH
- Unmarked dimensional tolerances ± 0.5mm
- Products meet RoHS standard.



J1 (USB通讯)

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C通讯)

PIN	定义
1	GND
2	GND
3	RST
4	INT
5	GND
6	SCL
7	SDA
8	VDD3.3
9	GND
10	GND

OBEY CO., LIMITED

TITLE: 产品编号	TS156002H-AAA	www.obtouch.com		
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2019.06.05	Scale: 比例
				1:1

A

B

F

F

E

E

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8