



| Rev. | Revision Record | 制作 | 日期 |
|------|-----------------|----|------------|
| A0 | 首次发行 | Y | 2020-05-29 |
| | | | |
| | | | |


FRONT

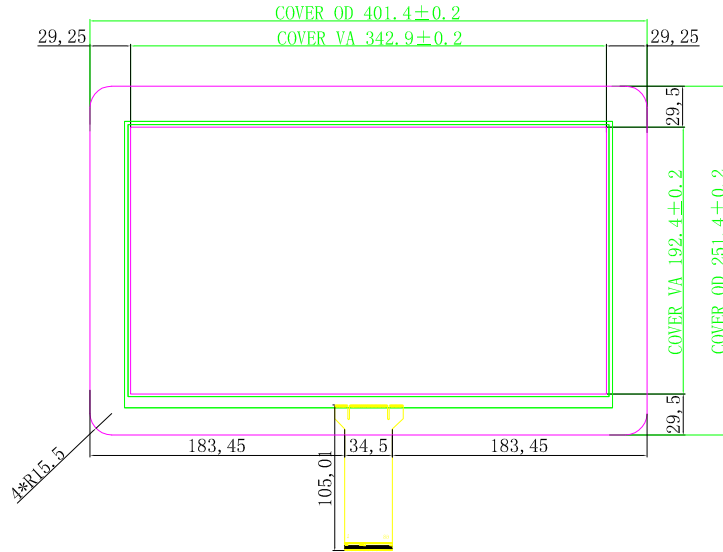

SIDE

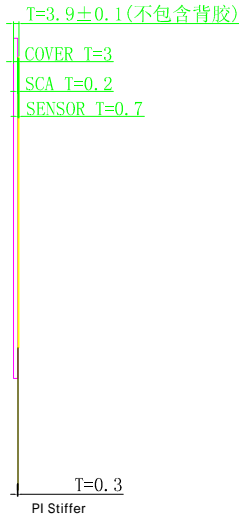

BACK

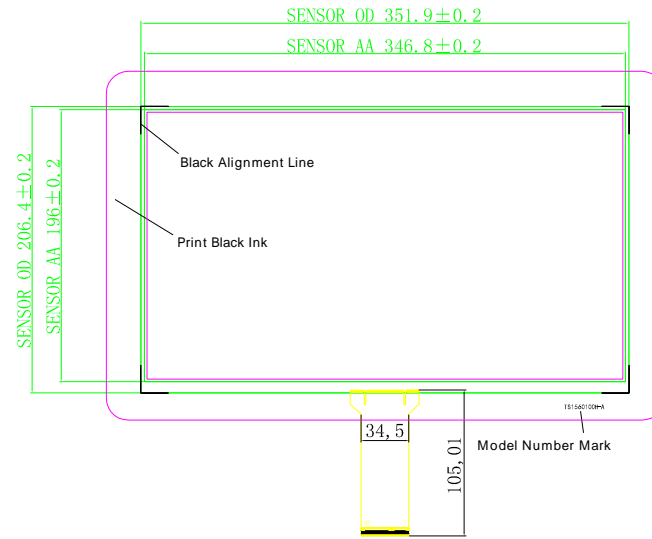

| J2 (I2C通讯) | |
|------------|--------|
| PIN | 定义 |
| 1 | GND |
| 2 | GND |
| 3 | RST |
| 4 | INT |
| 5 | GND |
| 6 | SCL |
| 7 | SDA |
| 8 | VDD3.3 |
| 9 | GND |
| 10 | GND |

| J1 (USB通讯) | |
|------------|--------|
| PIN | 定义 |
| 1 | VDD/5V |
| 2 | D- |
| 3 | D+ |
| 4 | GND |

Parameters:

- TP Structure: G+G
- TP Type: COB; IC: ILI2511,68P
HA2511P.P1.C3 Voltage: 5V
- Transmittance: 85%
- Surface Hardness: 6H
- Work Environment: -10 ~60 , 85%RH
- Storage Environment: -20 ~70 , 85%RH
- Unmarked dimensional tolerances ±0.5mm
- Products meet RoHS standard.



OBHEY CO., LIMITED

| | | | | | |
|--------------------|---------------|---------------------|------------|---------------|-----|
| TITLE: 产品编号 | TS156010H-AAA | www.obtouch.com | | | |
| Designed By: 设计 | Y | Customerid: 客户编号 | | View: 投影方式 | |
| Checked By: 审核 | | Unit: 单位 | mm | Scale: 比例 | 1:1 |
| Approved By: | | Date: 日期 | 2020.05.29 | | |