


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-10-09


FRONT

SIDE

BACK

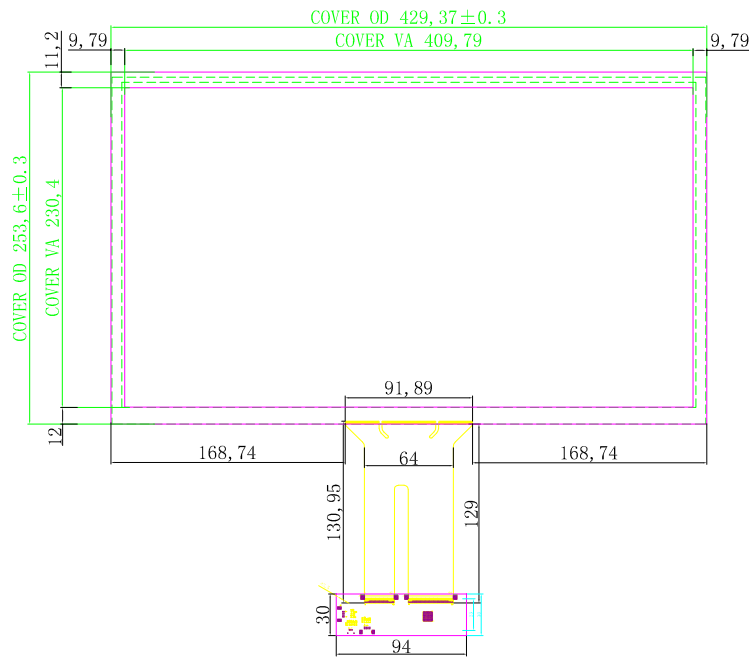

T=3.1  
COVER T=1.8  
SCA T=0.2  
SENSOR T=1.1

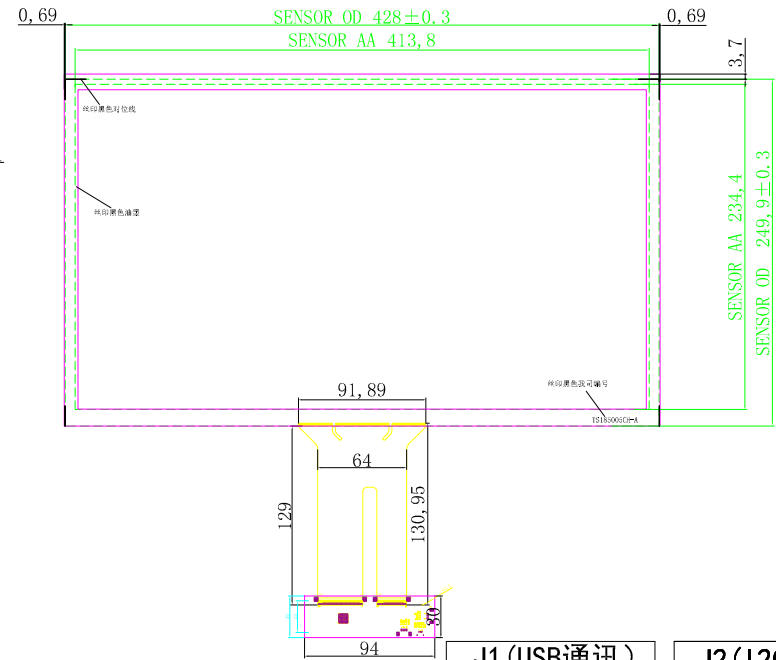

Parameters:

1. TP Structure: G+G
2. TP Type: COB; IC: ILI2510, 64\*42  
HA2510P.P1.C3 Voltage: 5V
3. Transmittance: 85%
4. Surface Hardness: 6H
5. Work Environment: -10 ~60 , 85%RH
6. Storage Environment: -20 ~70 , 85%RH
7. Unmarked dimensional tolerances ± 0.5mm
8. Products meet RoHS standard.

J1 (USB通讯)	
PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C通讯)	
PIN	定义
1	VDD3.3
2	GND
3	SDA
4	SCL
5	INT
6	RST

OBEY CO., LIMITED

TITLE: 产品编号	TS185005H-AAA	www.obtouch.com		
Customerid: 客户编号		Designed By: 设计	Y	View: 投影方式
Unit: 单位	mm	Checked By: 审核		
Date: 日期	2019.10.09	Approved By:		Scale: 比例
				1:1