


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-09-17


FRONT

SIDE

BACK

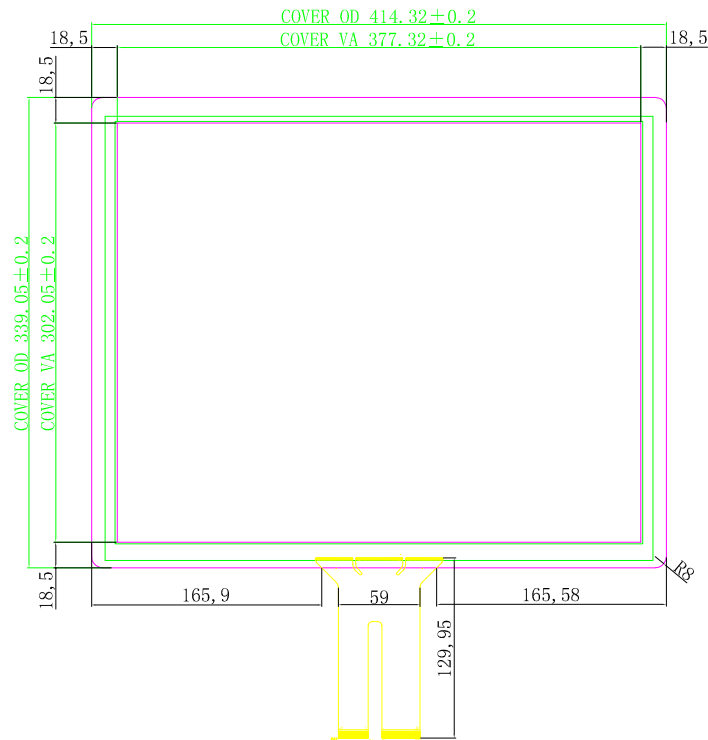

T=2.7 (not include adhesive)
COVER T=1.8
SCA T=0.2
SENSOR T=0.7

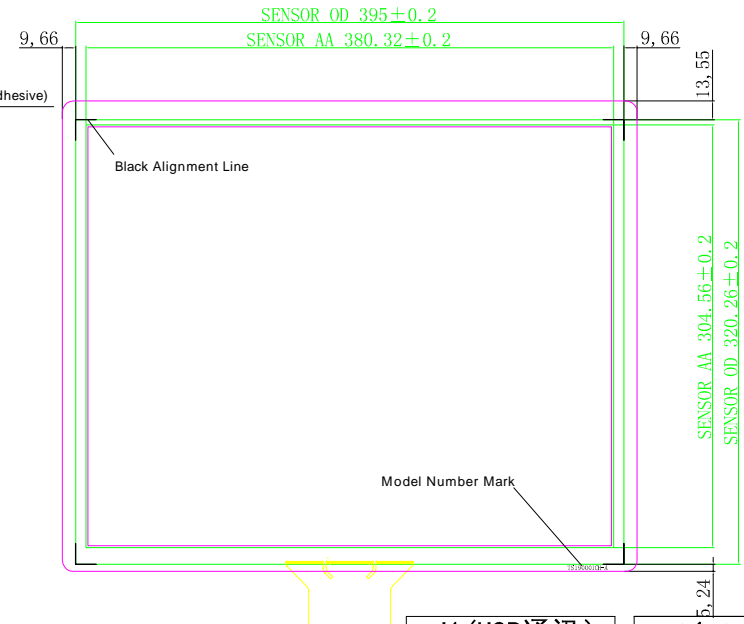

Parameters:

- TP Structure: G+G
- TP Type: COB; IC: ILI2510, 54*42
HA2510P.C3.P2.V1 Voltage: 5V
- Transmittance: 85%
- Surface Hardness: 6H
- Work Environment: -10 ~60 , 85%RH
- Storage Environment: -20 ~70 , 85%RH
- Unmarked dimensional tolerances ±0.5mm
- Products meet RoHS standard.



J1 (USB通讯)	
PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C通讯)	
PIN	定义
1	VDD3.3
2	GND
3	SDA
4	SCL
5	INT
6	RST

OBEY CO., LIMITED

TITLE: 产品编号	TS190001H-AAA	www.obtouch.com			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By:		Date: 日期	2019.09.17		