

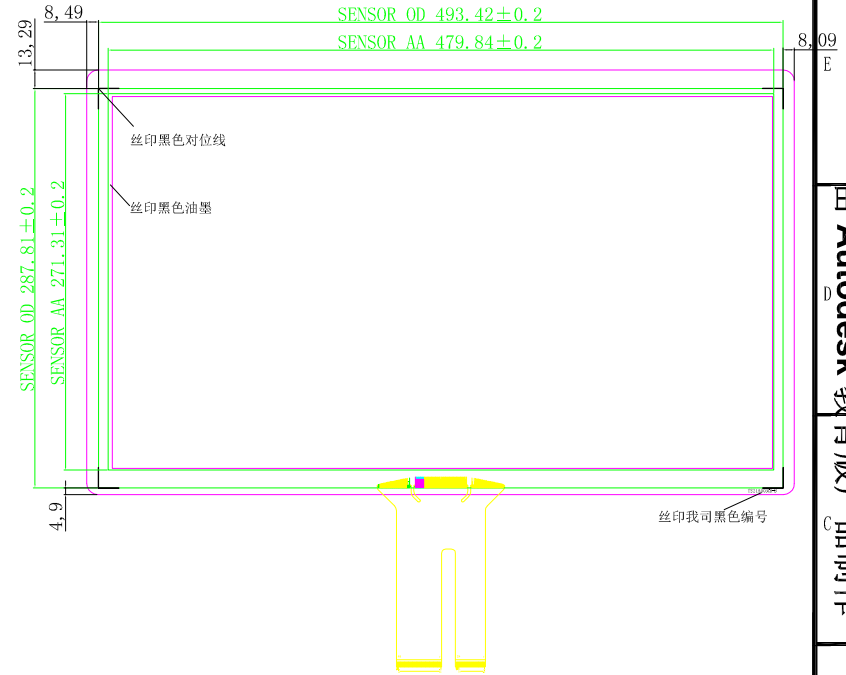


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-07-04
A1	更改盖板厚度为1.8mm	Y	2019-10-23

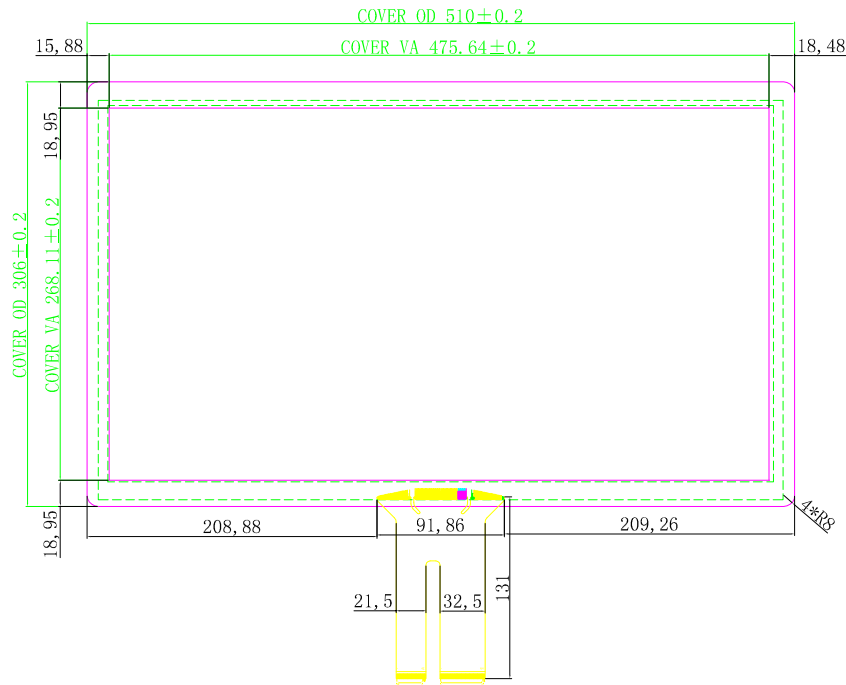

T=2.7
COVER T=1.8
SCA T=0.2
SENSOR T=0.7



Parameters:

- TP Structure: G+G
- TP Type: COB; IC: ILI2510, 42*64
HA2510P.P3.C3 Voltage: 5V
- Transmittance: 85%
- Surface Hardness: 6H
- Work Environment: -10 ~60 , 85%RH
- Storage Environment: -20 ~70 , 85%RH
- Unmarked dimensional tolerances $\pm 0.5\text{mm}$
- Products meet RoHS standard.

J1 (USB通讯)	
PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C通讯)	
PIN	定义
1	VDD3.3
2	GND
3	SDA
4	SCL
5	INT
6	RST

OBEY CO., LIMITED					
TITLE: 产品编号	TS215003H-BAA	www.obtouch.com			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By:		Date: 日期	2019.10.23		

Autodesk 教育版产品制作

Autodesk 教育版产品制作