


NO.	Rev.	Revision Record	Name	Date
△	A0	首次发行 (OB150012H-AAA基础上优化FOG, 减小盖板视窗)	H	2022-07-15
△	A1	盖板外形单边加大0.2MM	H	2022-10-11

### FRONT


### SIDE

### BACK

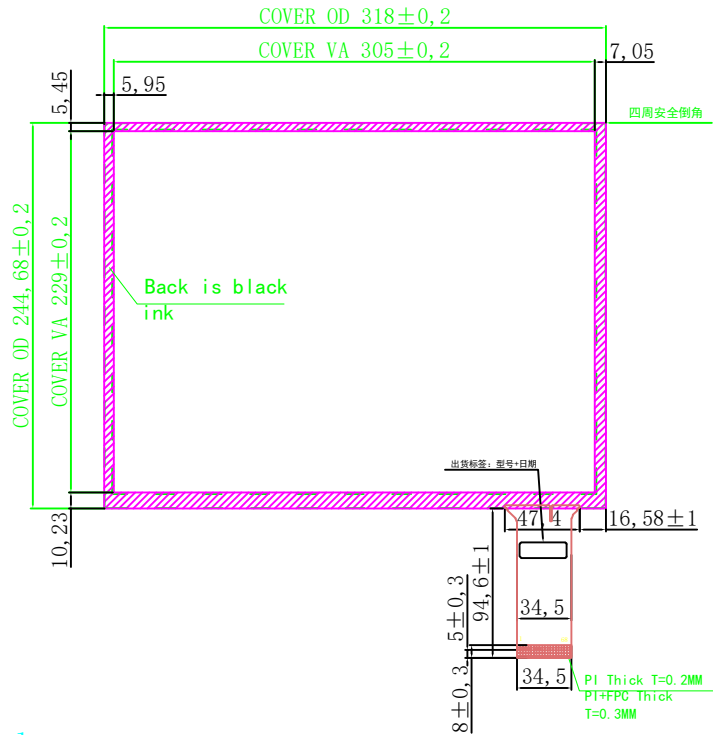

T=2.0 ± 0.2 不含泡棉胶  
COVER T=1.1 ± 0.1  
SCA T=0.2 ± 0.05  
SENSOR T=0.7 ± 0.05


PI+FPC 0, 3 ± 0, 03

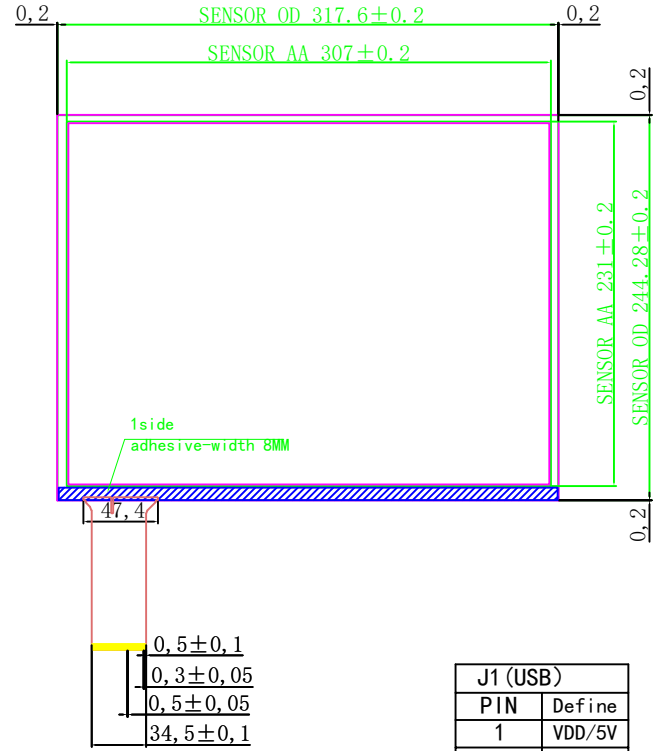

J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

### Technical

1. TP Structure: G+G; Work Voltage: 5V
2. TP Type: COB; IC: ILI2511, 68P
3. Transmittance:  $\geq 85\%$
4. Surface Hardness:  $\geq 6H$
5. Work Environment:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 85\%RH$
6. Storage Environment:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 85\%RH$
7. Unspecified dimensional tolerances  $\pm 0.3\text{mm}$
8. Product meet RoHS standard.

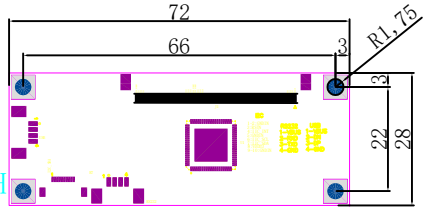

每片TP配一个PCB小板出货 (3: 1)

OBEY CO., LIMITED

www.obeycrop.com  
www.obtouch.com

TITLE: 产品编号	OB150012H-ABB-A1	结构图		
Designed By: 设计	H	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2022-10-11	Scale: 比例
				1:1